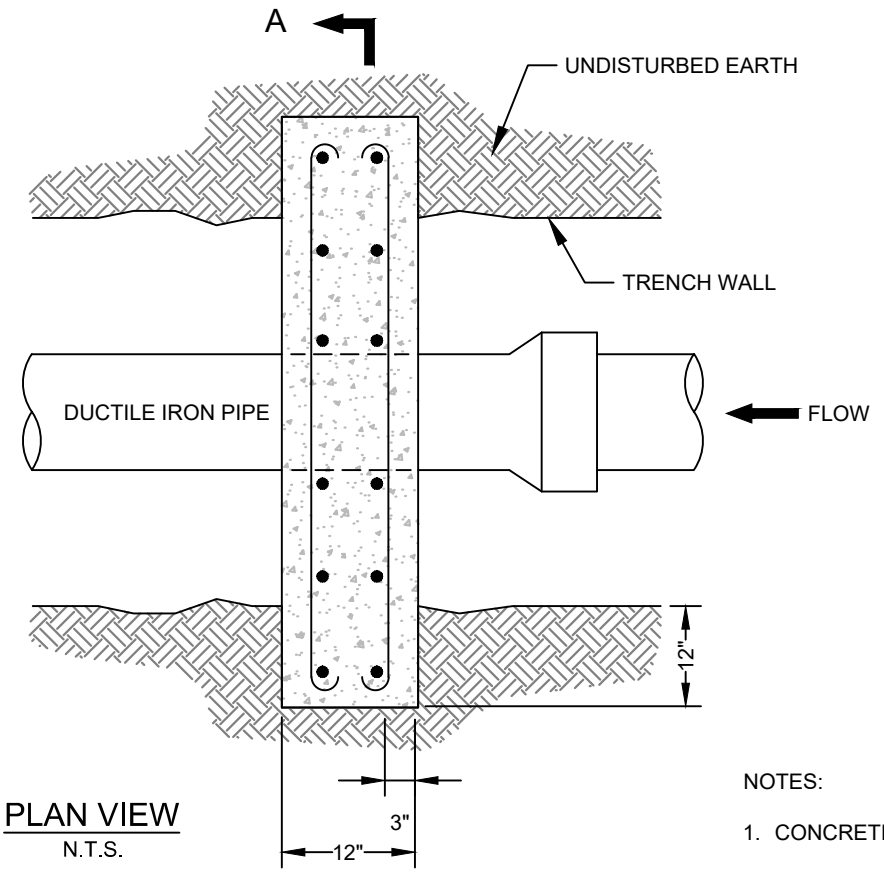

PLAN VIEW
N.T.S.

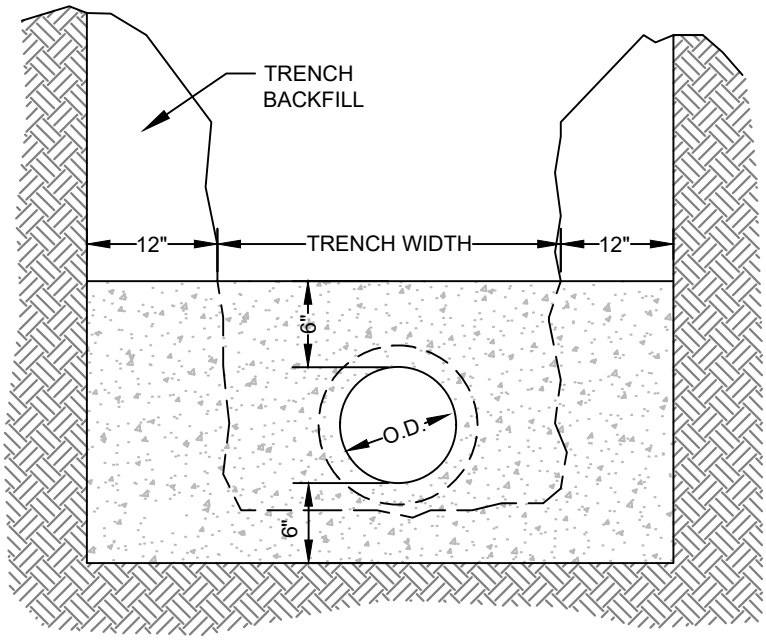

SECTION A-A
N.T.S

NOTES:

1. CONCRETE SHALL BE 3000 P.S.I.
2. REINFORCING SHALL BE No.4 BARS @ 12" E.W.
3. REINFORCING BARS SHALL BE FORMED AND TIED TOGETHER.
4. ANCHOR SPACING SHALL BE:

SLOPE	SPACING
20-35%	36 FT.
35-50%	24 FT.
> 50%	16 FT.

5. DUCTILE IRON PIPE MUST BE USED WHEN SLOPES ARE 20% OR GREATER
6. KEYING PIPES IS REQUIRED FOR ALL DIP INSTALLED @ 20% OR GREATER GRADE.

STANDARD DETAIL

Metropolitan Sewerage District
of Buncombe County, North Carolina

KEYING PIPES ON SLOPES

DATE APPROVED: MARCH 2017 | 3.02 - 03